

16-Port XGS-PON OLT with 8-Port 10G SFP+ + 2-Port 100G QSFP28




High-Performance 16-Port XGS-PON OLT with 40G/100G Uplink Capability

PLANET XGPL-16000 is a high-density 16-Port XGS-PON Optical Line Terminal (OLT) designed for next-generation fiber broadband access networks. It integrates 16 XGS-PON ports, 8 10G SFP+ ports, and 2 40G/100G QSFP28 uplink ports, offering exceptional scalability and bandwidth aggregation for large-scale deployments.

Key Features:

- 16 XGS-PON SFP slots with a 1:256 split ratio per port
- Two 40G/100G QSFP28 uplink interfaces for high-capacity backbone connectivity
- Eight 10G SFP+ ports for flexible service expansion or link redundancy
- Dual hot-swappable power supply (AC/DC/mixed) with front-to-back airflow
- Full L2/L3 features including VLAN, Q-in-Q, IGMP snooping, LACP, and RIP/OSPF
- Powerful QoS and SLA mechanisms with DBA per ONU
- CLI, SNMP, Telnet, and out-of-band management support

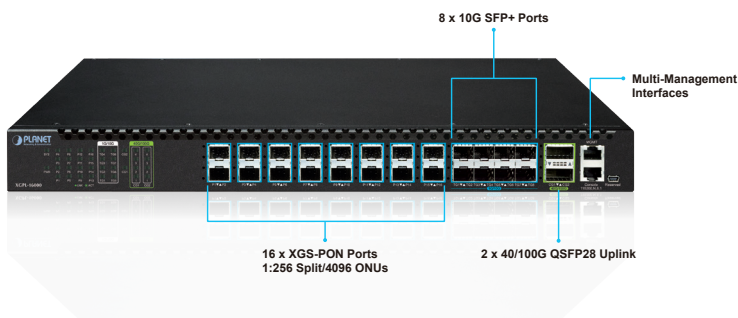

High-capacity Aggregation and Access

The XGPL-16000 supports a 1:256 split ratio per port, enabling access to up to 4096 ONUs in total. Each XGS-PON port provides symmetric 10Gbps downlink/uplink bandwidth, significantly outperforming legacy GPON systems. It supports N1/N2 XGS-PON transceivers and multiple GPON optical classes (B+/C+/C++/C+++/D+), making it backward compatible and deployment-flexible.

XGS-PON Ports

- 16 XGS-PON OLT SFP slots, backward compatible with XG-PON and GPON transceivers
- Up to 10Gbps symmetric downstream and upstream
- Maximum transmission distance of up to 20km
- Each PON port supports up to 256 ONT/HGU
- Compliant with ITU-T G.9807, G.987 and G.988

Physical Ports

- Eight 10GBASE-SR/LR SFP+ slots
- Two 40G/100G QSFP28 uplink slots
- RJ45 to DB9 console interface for system setup and management
- One 10/100BASE-TX out-of-band management port

OLT Management

- User-friendly CLI, Telnet, and SNMP management
- 2 control interfaces:
 - Out-of-Band IP – via dedicated management port
 - In-Band IP – via SFP+ and QSFP28 uplinks
- Supports ONT/HGU authentication to prevent unauthorized ONU access

ONU/HGU Management

- ONU/ONT port control
- VLAN configuration per ONT
- Supports DBA (Dynamic Bandwidth Allocation)
- SLA (Service Level Agreement) per ONU


IP Routing Features

- Supports dynamic routing protocol: RIP and OSPF
- IPv4 static routing
- Routing interface provides per VLAN routing mode

Layer 2 Features

- Supports VLAN
 - IEEE 802.1Q tag-based VLAN
 - Provider Bridging (VLAN Q-in-Q, IEEE 802.1ad) supported
 - GVRP for dynamic VLAN management
- Supports Link Aggregation
 - 802.3ad Link Aggregation Control Protocol (LACP)
 - Cisco ether-channel (static trunk)

Point to Multi-Point Application

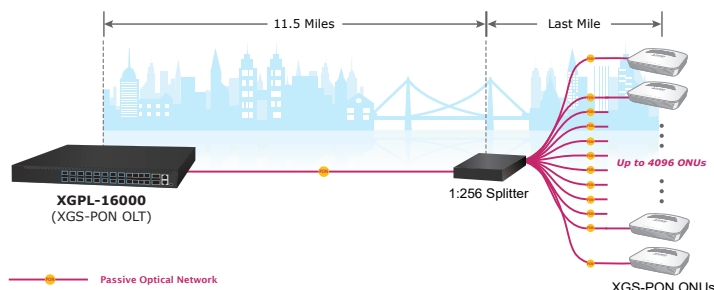

Strong Standards Compatibility

The XGPL-16000 is compliant with ITU-T G.9807/G.987/G.988 standards and adheres to China Telecom's GPON Technical Specification CTC 2.0. It also supports Ethernet-II, IEEE 802.1Q VLAN, Q-in-Q, and LACP, ensuring interoperability with a wide range of equipment and ONUs. The system supports Layer 2 multicast protocols, including IGMP snooping and MLD snooping, ensuring smooth IPTV and video-on-demand service delivery.

Powerful QoS and SLA Management

The device supports comprehensive QoS mechanisms, including IEEE 802.1p, CoS, WRR, SP, and FIFO queue scheduling, ensuring differentiated service levels for various traffic types. It also features DBA (Dynamic Bandwidth Allocation) and SLA (Service Level Agreement) functions per ONU, providing precise bandwidth control and carrier-grade traffic assurance.

Carrier-class Security and Reliability

The XGPL-16000 offers advanced security features, such as ACL (Access Control List), port isolation, broadcast storm suppression, and data encryption over PON interfaces. The system supports Type B and Type C optical path protection, abnormal ONU emission detection, and trunk fiber link protection, ensuring fault tolerance and minimal downtime in critical networks.

Modular, Redundant, and Eco-Friendly Design

The XGPL-16000 adopts a modular dual-power-slot design, supporting hot-swappable AC, DC, or mixed AC/DC power modules. The fan system uses a front-to-back airflow layout, optimized for rack-mounted deployments. It supports EMC level 3, operates under harsh temperature and humidity conditions, and provides low-noise and low-power operation to meet long-term deployment needs in data centers and equipment rooms.



- Supports Spanning Tree Protocol
 - STP, IEEE 802.1D (Classic Spanning Tree Protocol)
 - RSTP, IEEE 802.1w (Rapid Spanning Tree Protocol)
 - MSTP, IEEE 802.1s (Multiple Spanning Tree Protocol, spanning tree by VLAN)
- Port mirroring to monitor the incoming or outgoing traffic on a particular port (many to 1)
- Supports G.8032 ERPS (Ethernet Ring Protection Switching)
- Loop protection to avoid broadcast loops
- Link Layer Discovery Protocol (LLDP)

Quality of Service

- Ingress shaper and egress rate limit per port
- 8 priority queues per port
 - IEEE 802.1p CoS
 - VLAN ID priority
 - DSCP/Precedence
- Policy-based QoS on ingress/egress

Multicast

- Supports IPv4 IGMP snooping v1, v2 and v3
- Supports IPv6 MLD snooping v1 and v2
- Querier mode support
- MVR (Multicast VLAN Registration)

Security

- Authentication
 - IEEE 802.1x port-based network access authentication
 - Built-in RADIUS client to cooperate with the RADIUS servers
 - RADIUS/TACACS+ users access authentication
- Access Control List
 - IP-based Access Control List (ACL)
 - MAC-based Access Control List (ACL)
 - Time-based ACL
- DHCP Snooping to filter distrusted DHCP messages
- Dynamic ARP Inspection discards ARP packets with invalid MAC address to IP address binding
- IP Source Guard prevents IP spoofing attacks

Management

- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
 - Console and Telnet Command Line Interface
 - HTTP web switch management

Flexible and Efficient Management

The device offers multiple management interfaces, including CLI (console), Telnet, SNMP, and out-of-band Ethernet management. It supports TFTP remote software upgrade, debugging output, system logs, and batch ONU provisioning. With strong system maintainability and remote operation capabilities, it ensures simplified network operation and management (OAM).

Applications

Flexible 10G XGS-PON Solution for FTTH and Enterprise Applications


Designed for both high-density residential areas and multi-building commercial deployments, the XGPL-16000 offers a high-capacity, carrier-grade fiber access solution. Each of its 16 XGS-PON ports supports a 1:256 split ratio, enabling connection of up to 4096 ONUs through a single chassis.

Equipped with 100G uplink capability, the XGPL-16000 ensures reliable, high-throughput backhaul for a wide range of services—ranging from 4K/8K video streaming, IPTV, and VoIP for FTTH users, to IP surveillance, secure data access, and seamless enterprise connectivity in business environments.


Its high scalability and symmetric 10Gbps bandwidth make it the ideal solution for ISPs, system integrators, and enterprises looking to deploy robust next-generation fiber networks.

- SNMP v1 and v2c switch management
- SSHv2, SSLv3, TLSv1.0 and SNMP v3 secure access
- SNMP Management
 - Four RMON groups (history, statistics, alarms, and events)
 - SNMP trap for interface Link Up and Link Down notification
- Built-in Trivial File Transfer Protocol (TFTP) client
- BOOTP and DHCP for IP address assignment
- System Maintenance
 - Firmware upload/download via HTTP
 - Dual images
- DHCP Functions:
 - DHCP Relay
 - DHCP Option 82
 - DHCP Server
- User Privilege levels control
- Network Time Protocol (NTP) and SNTP
- Network Diagnostic
 - SFP-DDM (Digital Diagnostic Monitor)
 - ICMP remote IP ping
- Syslog remote alarm
- System Log

Fiber To The Home (FTTH) Application

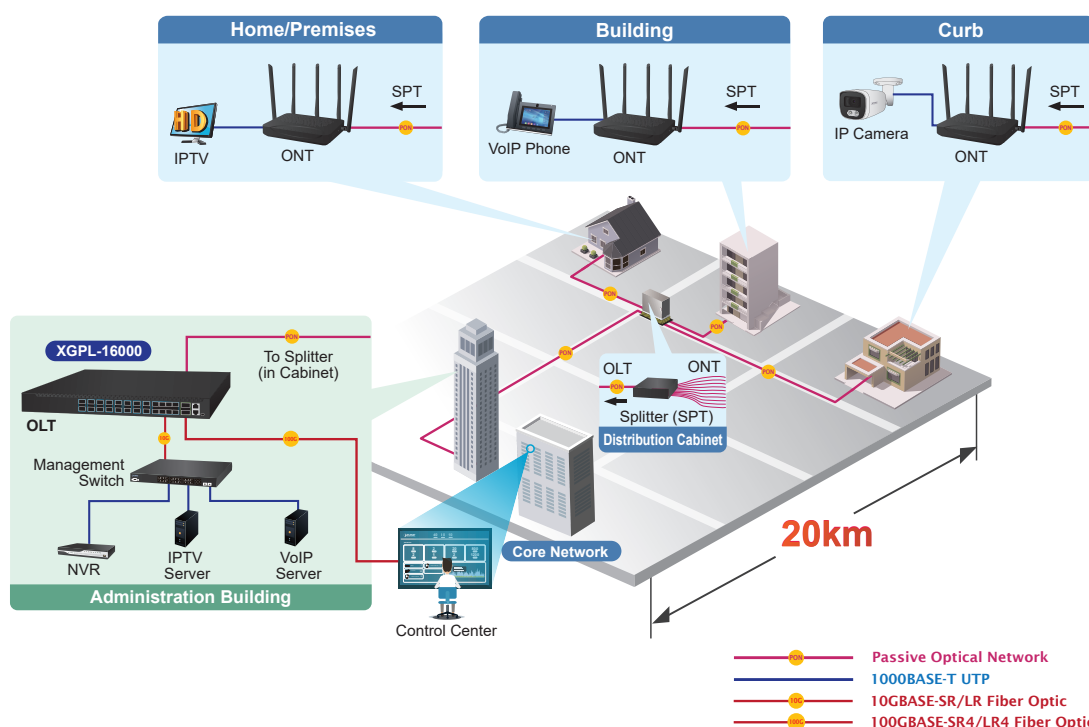

PLANET XGS-PON Solution for Business Deployments

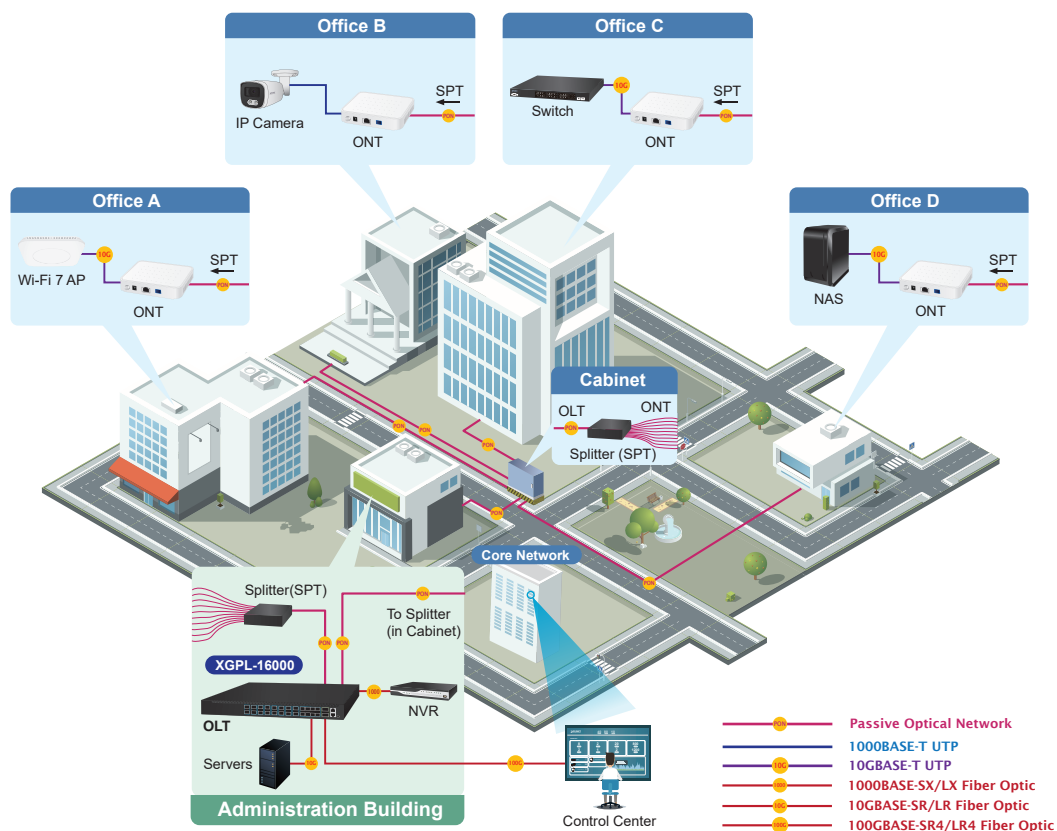


Specifications

Product	XGPL-16000
Hardware Specifications	
XGS-PON Ports	16, supporting Class B+/C+/C++/C+++/D+ XGS-PON/GPON transceivers
10GBASE-X SFP+ Slots	8, supporting 10GBASE-SR/LR SFP+ transceiver Backward compatible with 1GBASE-X SFP transceivers
100G QSFP28 Ports	2-port 100G QSFP28 Backward compatible with 40G QSFP+
Management Port	One 10/100BASE-TX RJ45 port
Console	One RJ45-to-RS232 serial port (115200, 8, N, 1)
RAM	2048MB
Flash Memory	4096MB
Dimensions (W x D x H)	442.5 x 280 x 44.6 mm
Weight	4,600g with single modular power supply
Power Consumption	120 watts/409.56BTU
Power Requirements - AC	100~240V AC, 1.5A max.
Power Requirements - DC	36~72V DC, 3A max.
Fan	4 Fans, Front-to-back airflow
Switching	
Switch Architecture	Store-and-forward
Switch Fabric	176Gbps
Address Table	128K
ARP Table	36K
ACL Table	Max. 3840 for IPv4 Max. 1920 for IPv6
Shared Data Buffer	2MB
Jumbo Frame	9KB
Flow Control	Back pressure for half duplex IEEE 802.3x pause frame for full duplex
XGS-PON Specifications	
Transmission Speed	Downstream: 10Gbps; Upstream: 10Gbps (XGS-PON) Downstream: 10Gbps; Upstream: 2.5Gbps (XG-PON) Downstream: 2.5Gbps; Upstream: 1.25Gbps (GPON)
Optical Split Ratio	Up to 256 per port
Transmission Distance	20km
PON Module Wavelength	XG(S)-PON: TX 1577nm / RX 1270nm GPON: TX 1490nm / RX 1310nm
PON Fiber Type	9/125um SMF (Single mode fiber optic)
Layer 3 Functions	
IP Interfaces	Up to 1K VLAN interfaces, shared by both IPv4 and IPv6
Routing Table	8K for IPv4 20K for IPv6
Routing Protocols	Static Routing RIP OSPF BGP IS-IS VRRP
Layer 2 Functions	
Port Configuration	Port disable/enable Flow control disable/enable Bandwidth control on each port Port loopback detect
Port Mirroring	TX/RX/Both Many to 1
VLAN	IEEE 802.1Q tag-based VLAN, up to 4K VLAN groups IEEE 802.1ad Q-in-Q VLAN stacking/tunneling Flexible Q-in-Q GVRP for VLAN management
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)

Multicast	IPv4 IGMP v1/v2/v3 snooping IPv4 Querier mode support IGMP Filtering and IGMP Throttling IGMP Proxy reporting IGMP multicast forwarding
	IPv6 MLD v1/v2 snooping Multicast VLAN Register (MVR) Up to 3840 multicast groups
Link Aggregation	IEEE 802.3ad Link Aggregation Control Protocol (LACP) Static trunk link aggregation Supports 64 groups with 16 ports per trunk group Up to 80Gbps bandwidth (full duplex mode) Load Balance Algorithm: - Source IP/destination IP/Source + destination IP - Source MAC/destination MAC/Source + destination MAC
Storm Control	Per 100pps 1-14880
Bandwidth Control	Supports rate limiting per ONU / per port At least 64Kbps stream Dynamic Bandwidth Allocation (DBA) on PON ports Supports SLA (Service Level Agreement)
QoS	PON interfaces: Dynamic Bandwidth Allocation (DBA) Service Level Agreement (SLA) Limiting the upstream/downstream rate based on each ONT/ONU/HGU
	8 priority queues on all switch ports Scheduling for priority queues - Weighted Round Robin (WRR) - Strict priority Traffic classification: - IEEE 802.1p CoS/DSCP/Precedence - VLAN ID - Policy-based ingress and egress QoS
Ring	ITU-T G.8032 ERPS Ring
Security Functions	
Access Control List	Supports Standard and Expanded ACL - IP-based ACL - MAC-based ACL - Time-based ACL ACL based on: - MAC Address - IPv4/IPv6 IP Address - Protocol-number - Sport/dport - ToS/Precedence Up to 1k entries
Security	Transmission data encryption on the PON interface MAC limitation MAC sticky Port isolation DHCP snooping Dynamic ARP inspection IP source guard
AAA	TACACS+ and IPv4/IPv6 over RADIUS
Network Access Control	IEEE 802.1x port-based network access control
Management Functions	
System Configuration	Console and Telnet Web browser SNMP v1, v2c
Secure Management Interfaces	SSHv2, SSLv3 Maximum 8 sessions for SSH and telnet connection

System Management	IPv4 and IPv6 dual stack management SNMP MIB and TRAP SNMP RMON 1, 2, 3, 9 four groups Firmware upgrade by HTTP/TFTP/FTP protocol through Ethernet network Configuration upload/download through HTTP/TFTP/FTP protocol Supports IEEE 802.1ab LLDP protocol NTP and SNTP client RADIUS authentication for IPv4/IPv6 login user name and password
Event Management	Remote syslog System log
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Internet Engineering Task Force RFC 1271 RMON RFC 1354 IP-Forwarding MIB RFC 1493 Bridge MIB RFC 1643 Ether-like MIB RFC 1907 SNMPv2 RFC 2011 IP/ICMP MIB RFC 2012 TCP MIB RFC 2013 UDP MIB RFC 2096 IP forward MIB RFC 2233 if MIB RFC 2452 TCP6 MIB RFC 2454 UDP6 MIB RFC 2465 IPv6 MIB RFC 2466 ICMP6 MIB RFC 2573 SNMPv3 notification RFC 2574 SNMPv3 VACM RFC 2674 Bridge MIB Extensions
Standard Conformance	
Regulatory Compliance	CE, FCC, LVD
Standards Compliance	IEEE 802.3z Gigabit 1000BASE-SX/LX IEEE 802.3ae 10Gb/s Ethernet IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1X port authentication network control IEEE 802.1ab LLDP RFC 768 UDP RFC 793 TFTP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2 RFC 3376 IGMP v3
Environments	
Operating	Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 90% (non-condensing)
Storage	Temperature: -10 ~ 70 degrees C Relative Humidity: 5 ~ 90% (non-condensing)

Dimensions

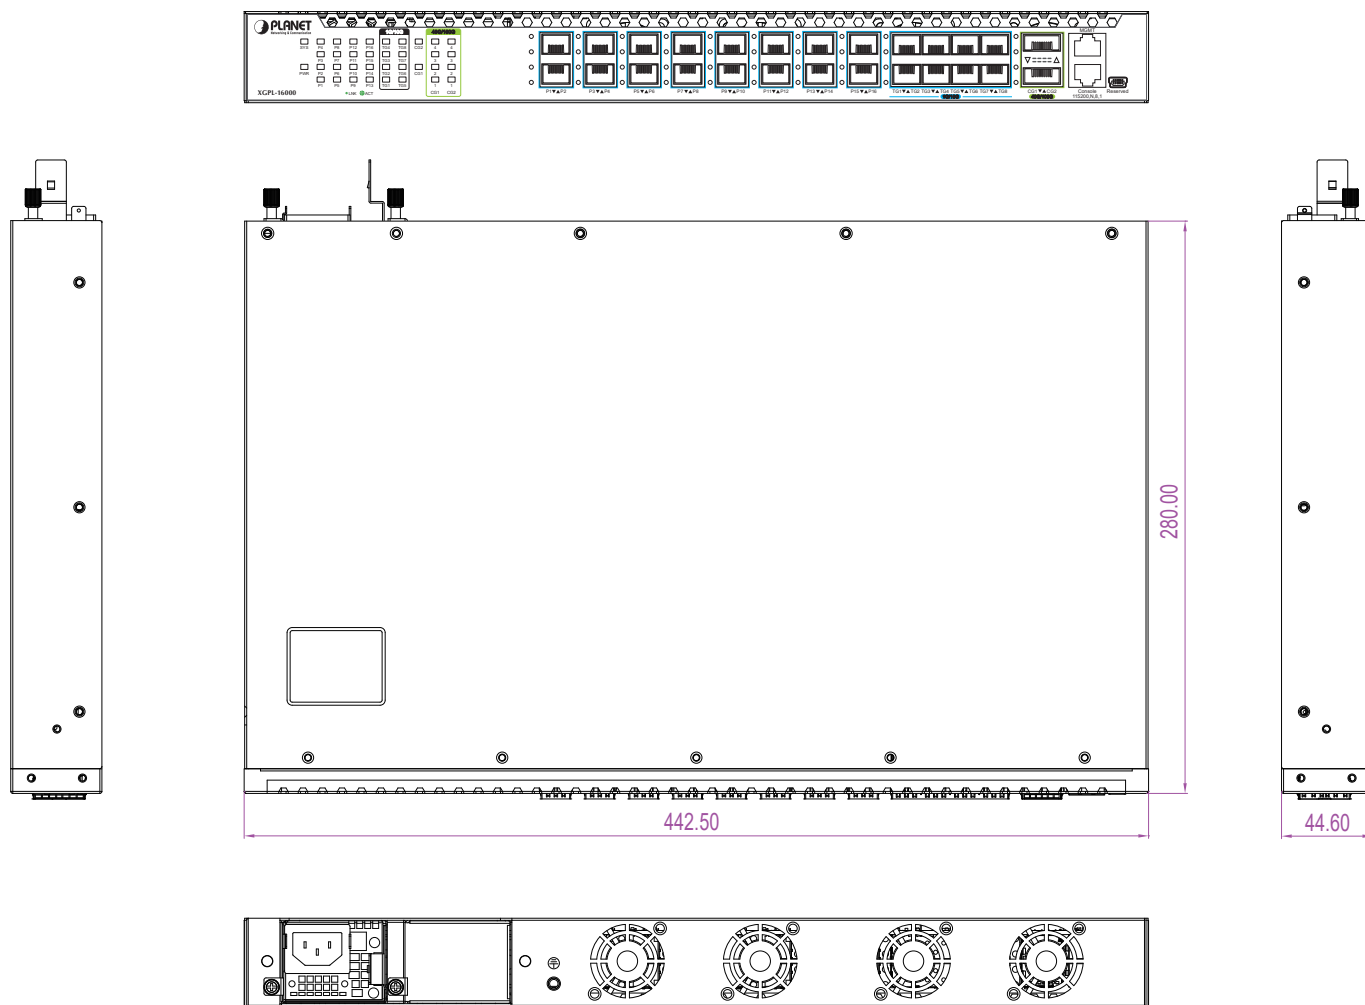

Dimensions (W x D x H): 442.5 x 280 x 44.6 mm

Ordering Information

XGPL-16000	16-Port XGS-PON OLT with 8-Port 10G SFP+ + 2-Port 100G QSFP28
------------	---

Accessories

XGPL-XGSFP-N1	N1 XGS-PON OLT SFP Transceiver (ODN Class N1, Download 10G/Upload 10G/2.5G, TX: 1577nm, RX: 1270nm) - 20km
XGPL-XGSFP-N2	N1 XGS-PON OLT SFP Transceiver (ODN Class N2, Download 10G/Upload 10G/2.5G, TX: 1577nm, RX: 1270nm) - 20km
CB-QSFP100G-1M	100G QSFP28 Direct Attached Copper Cable - 1M
CB-QSFP100G-3M	100G QSFP28 Direct Attached Copper Cable - 3M
CB-QSFP100G-5M	100G QSFP28 Direct Attached Copper Cable - 5M
CB-QSFP4X25G-3M	100G QSFP28 to 4 25G SFP28 Breakout Cable - 3M
XGPL-PWR150-AC	150-watt AC power supply for XGPL-16000 (100V-240VAC)
XGPL-PWR150-DC	150-watt DC power supply for XGPL-16000 (36V~72VDC)
GPL-GSFP-C+	GPON OLT SFP Transceiver (Class C+, Optical Power: 3dBm~7dBm, Download 2.5G/Upload 1.25G, TX: 1490nm, RX: 1310nm) - 20km
GPL-GSFP-C++	GPON OLT SFP Transceiver (Class C++, Optical Power: 4.5dBm~10dBm, Download 2.5G/Upload 1.25G, TX: 1490nm, RX: 1310nm) - 20km

Related Products

XGPN-100	XGS-PON SFU ONT with 1-Port 10GbE
XGPN-400AXV	XG-PON HGU with 4-Port GbE, 3000Mbps 802.11AX Wireless and 1-Port FXS
EPL-SPT-32	GEPON Splitter (1 x 32 PLC Splitter, Wavelength 1230 ~ 1650 nm)
EPL-SPT-64	GEPON Splitter (1 x 64 PLC Splitter, Wavelength 1230 ~ 1650 nm)

Available Modules for XGPL-16000

10Gigabit Ethernet Transceiver

MTB-LB40	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1330nm RX:1270nm) (-40~85°C)
MTB-LA40	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1270nm RX:1330nm) (-40~85°C)
MTB-LB20	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1330nm RX:1270nm) (-40~85°C)
MTB-LA20	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1270nm RX:1330nm) (-40~85°C)
MTB-SR	1-Port 10GBASE-SR SFP+ Fiber Optic Module - 300m (-40~85°C)
MTB-LR	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 10km (-40~85°C)
MTB-LA60	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1270nm RX:1330nm) (-40~85°C)
MTB-LB60	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1330nm RX:1270nm) (-40~85°C)
MTB-LR40	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 40km (-40~85°C)
MTB-SR2	1-Port 10GBASE-SR SFP+ Fiber Optic Module - 2km (-40~85°C)
MTB-LR20	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 20km (-40~85°C)
MTB-LR60	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 60km (-40~85°C)
MTB-LR80	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 80km (-40~85°C)

Gigabit Ethernet Transceiver (1000BASE-X SFP)

MGB-GT	SFP-Port 1000BASE-T Module (-40~85°C)
MGB-LX	SFP-Port 1000BASE-LX mini-GBIC module - 20km (-40~85°C)
MGB-SX	SFP-Port 1000BASE-SX mini-GBIC module - 550m (-40~85°C)
MGB-SX2	SFP-Port 1000BASE-SX mini-GBIC module - 2km (-40~85°C)
MGB-L40	SFP-Port 1000BASE-LX mini-GBIC module - 40km (-40~85°C)
MGB-L80	SFP-Port 1000BASE-LX mini-GBIC module - 80km (-40~85°C)
MGB-LA10	SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 10km (-40~85°C)
MGB-LB10	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 10km (-40~85°C)
MGB-LA20	SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 20km (-40~85°C)
MGB-LB20	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 20km (-40~85°C)
MGB-LA40	SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 40km (-40~85°C)
MGB-LB40	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 40km (-40~85°C)
MGB-LA80	SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 80km (-40~85°C)
MGB-LB80	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 80km (-40~85°C)
MGB-LA120	SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 120km (-40~85°C)
MGB-LB120	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 20km (-40~85°C)

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City

231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2025 PLANET Technology Corp. All rights reserved.

XGPL-16000